



To: All Plan Holders of Record

From: CT Consultants, Inc.  
For the Owner

**Re: Addendum No. 1  
Sharon Road Resurfacing and Turn Lane at Mosteller Road  
City of Sharonville, OH**


Date: May 11, 2021

This Addendum forms a part of the contract documents and modifies the original bidding documents dated April 2021 and all previous addenda, if any. Acknowledge receipt of this addendum in the space provided in the bid forms. Failure to do so may subject the bidder to disqualification.

Bid Opening Date and Time: **THURSDAY, MAY 13, 2021 (Unchanged)**

CHANGES:

1. Item No. 58: Spec No. 625 - Conduit, 4", 725.04 (Galvanized) shall be changed to Spec No. 625 - Conduit, 4", 725.052 (Schedule 80 HDPE)
2. Page 7 in the Contract Documents and Specifications – DATE FOR COMPLETION: All roadway construction, including widening, resurfacing, and pavement markings on the project must be complete and open to traffic by December 1, 2021. The proposed traffic signal and remainder of the project must be completed by March 15, 2022.
3. Page 2 in the Contract Documents and Specifications – 2019 ODOT Construction and Materials Specifications shall govern the improvements, not 2016.
4. The updated quantity for Item No. 25: Spec No. 609 – Curb Type 6, As Per Plan is 1,260 FT. The remaining curb is integral with the proposed sidewalk.
5. The Engineer's estimate has been updated to \$1,262,560.00.
6. The Item 608 – Concrete Sidewalk w/ Integral Curb, As Per Plan detail shown on Sheet 4/21 of the construction plans. The existing pavement shall be sawcut to the full depth at a typical of 30" from the back of curb, as shown. The distance in between the sawcut edge of pavement and the face of curb shall be filled in with the following pavement section: Item 304 (as needed), 12" Item 452, 1.25" Intermediate Course, and 1.25" Surface Course. All costs for the above shall be included in the unit price bid for this item.

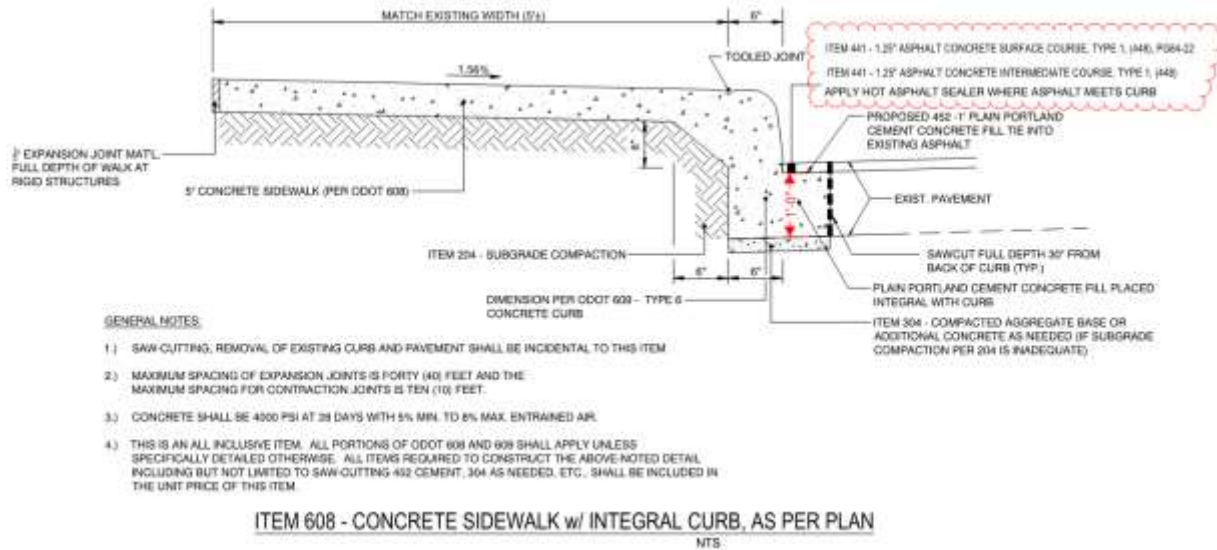

END ADDENDUM 1

SR:rgf

Attachment



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

*Addendum 1  
(Revised)*

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
1	201	CLEARING AND GRUBBING, AS PER PLAN	1	LS		
2	202	HEADWALL REMOVED	3	EA		
3	202	PIPE REMOVED, 24" AND UNDER	60	FT		
4	202	WALK REMOVED	6150	SF		
5	202	CATCH BASIN REMOVED	1	EA		
6	203	EXCAVATION INCLUDING PAVEMENT REMOVAL	600	CY		
7	203	EMBANKMENT	500	CY		
8	204	SUBGRADE COMPACTION	1270	SY		
9	204	PROOF ROLLING	2	HR		
10	204	*SUBGRADE REPAIR WITH GEOGRID	50	SY		
11	253	*PAVEMENT REPAIR	400	SY		
12	253	*PAVEMENT REPAIR, MISCELLANEOUS: SLAG STABILIZATION	50	CY		
13	254	PAVEMENT PLANING (2.5")	20,700	SY		
14	301	ASPHALT CONCRETE BASE (7.5")	265	CY		
15	301	ASPHALT CONCRETE BASE - DRIVES (6")	8	CY		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

**Addendum 1  
(Revised)**

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
16	304	AGGREGATE BASE (6")	212	CY		
17	407	NON-TRACKING TACK COAT	1760	GAL		
18	441	ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG-64-22 (1.25")	762	CY		
19	441	ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448) (1.25")	762	CY		
20	452	9" NON-REINFORCED CONCRETE PAVEMENT (DRIVE APRON)	140	SY		
21	607	FENCE, 6' CHAIN LINK w/ 3-STRAND BARBED WIRE, AS PER PLAN (TEMPORARY)	950	FT		
22	607	FENCE, 6' CHAIN LINK w/ 3-STRAND BARBED WIRE, AS PER PLAN (PERMANENT)	835	FT		
23	608	5" CONCRETE WALK w/ INTEGRAL CURB, AS PER PLAN	6150	SF		
24	608	CURB RAMP w/ DETECTABLE WARNING	2	EA		
25	609	CURB, TYPE 6 AS PER PLAN - Addendum #1	1260	FT		
26	611	12" CONDUIT, TYPE B	15	LF		
27	611	18" CONDUIT, TYPE C	513	LF		
28	611	24" CONDUIT, TYPE B	45	LF		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

*Addendum 1  
(Revised)*

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
29	611	CATCH BASIN, TYPE 2-2B	2	EA		
30	611	CATCH BASIN, TYPE 2-3B	1	EA		
31	611	CURB INLET, TYPE 3A	1	EA		
32	611	HEADWALL (18")	1	EA		
33	611	CATCH BASIN REPLACEMENT, AS PER PLAN	7	EA		
34	611	CATCH BASIN RECONSTRUCTED TO GRADE (CONTINGENCY ITEM - USE AS DIRECTED)	2	EA		
35	611	MANHOLE/UTILITY BOX ADJUSTED TO GRADE	25	EA		
36	614	MAINTAINING TRAFFIC	1	LS		
37	630	SIGN, FLAT SHEET	30	SF		
38	630	GROUND MOUNTED SUPPORT, No. 3 POST	65	FT		
39	623	CONSTRUCTION LAYOUT STAKING	1	EA		
40	624	MOBILIZATION	1	EA		
41	644	EDGE LINE (4")	1.5	MILE		
42	644	LANE LINE (4")	1.5	MILE		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

*Addendum 1  
(Revised)*

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
43	644	CENTER LINE, (4") DOUBLE YELLOW	0.75	MILE		
44	644	CHANNELIZING LINE (8")	900	FT		
45	642	STOP LINE	10	FT		
46	644	LANE ARROW	11	EA		
47	642	WORD ON PAVEMENT (36") "STOP"	1	EA		
48	644	STOP LINE (24")	60	FT		
49	644	CROSSWALK LINE (12")	340	FT		
50	671	EROSION CONTROL MATTING	500	SY		
<b>MOSTELLER AT SHARON ROAD TRAFFIC SIGNAL</b>						
51	625	CONNECTION, FUSED PULL APART	2	EA		
52	625	CONNECTION, UNFUSED PULL APART	2	EA		
53	625	BRACKET ARM, 30', AS PER PLAN	2	EA		
54	625	NO. 6 AWG 2400 VOLT DISTRIBUTION CABLE	612	FT		
55	625	NO. 10 AWG POLE AND BRACKET CABLE	540	FT		
56	625	CONDUIT, 2", 725.051	48	FT		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

Addendum 1  
 (Revised)

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
57	625	CONDUIT, 3", 725.051	32	FT		
58	625	CONDUIT, 4", 725.052 (Schedule 80 HDPE) - Addendum #1	191	FT		
59	625	CONDUIT, 4", 725.051	50	FT		
60	625	LUMINAIRE, CONVENTIONAL, SOLID STATE (LED), AS PER PLAN	2	EA		
61	625	TRENCH	102	FT		
62	625	TRENCH IN PAVED AREA, TYPE B	191	FT		
63	625	PULLBOX, 725.08, 18"	3	EA		
64	625	PULLBOX, 725.08, 24"	1	EA		
65	625	GROUND ROD	6	EA		
66	630	SIGN HANGER ASSEMBLY, MAST ARM, AS PER PLAN	10	EA		
67	630	SIGN SUPPORT ASSEMBLY, POLE MOUNTED, AS PER PLAN	1	EA		
68	630	SIGN, FLAT SHEET, AS PER PLAN	56.5	SF		
69	630	COVERING OF SIGN	52.5	SF		
70	631	PHOTOELECTRIC CONTROL	1	EA		
71	631	INTERNALLY ILLUMINATED FIXED MESSAGE SIGN, AS PER PLAN	3	EA		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

Addendum 1  
 (Revised)

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
72	632	VEHICULAR SIGNAL HEAD, (LED), 3-SECTION, 12" LENS, 1-WAY, POLYCARBONATE (BLACK), AS PER PLAN	6	EA		
73	632	VEHICULAR SIGNAL HEAD, (LED), 4-SECTION, 12" LENS, 1-WAY, POLYCARBONATE (BLACK), AS PER PLAN	2	EA		
74	632	VEHICULAR SIGNAL HEAD, (LED), 5-SECTION, 12" LENS, 1-WAY, POLYCARBONATE (BLACK), AS PER PLAN	3	EA		
75	632	PEDESTRIAN SIGNAL HEAD (LED), TYPE D2, COUNTDOWN, AS PER PLAN	4	EA		
76	632	COVERING OF VEHICULAR SIGNAL HEAD	11	EA		
77	632	COVERING OF PEDESTRIAN SIGNAL HEAD	4	EA		
78	632	PEDESTRIAN PUSHBUTTON, AS PER PLAN	4	EA		
79	632	SIGNAL CABLE, 3 CONDUCTOR, NO. 14 AWG	45	FT		
80	632	SIGNAL CABLE, 5 CONDUCTOR, NO. 14 AWG	798	FT		
81	632	SIGNAL CABLE, 7 CONDUCTOR, NO. 14 AWG	1,232	FT		
82	632	SIGNAL SUPPORT FOUNDATION	2	EA		
83	632	PEDESTAL FOUNDATION	3	EA		
84	632	POWER CABLE, 2 CONDUCTOR, NO. 6 AWG	45	FT		
85	632	POWER CABLE, 3 CONDUCTOR, NO. 6 AWG	45	FT		

\* Denotes Contingency Item





**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

Addendum 1  
 (Revised)

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
86	632	SERVICE CABLE, 3 CONDUCTOR, NO. 6 AWG	100	FT		
87	632	POWER SERVICE AS PER PLAN	1	EA		
88	632	CONDUIT RISER, 2" DIAMETER	1	EA		
89	632	COMBINATION SIGNAL SUPPORT, TYPE TC-12.31, DESIGN 10 POLE, WITH MAST ARMS TC-81.22 DESIGN 13 AND DESIGN 12, AS PER PLAN	1	EA		
90	632	COMBINATION SIGNAL SUPPORT, TYPE TC-12.31, DESIGN 12 POLE, WITH MAST ARMS TC-81.22 DESIGN 14 AND DESIGN 13, AS PER PLAN	1	EA		
91	632	PEDESTAL, 8' TRANSFORMER BASE, AS PER PLAN	2	EA		
92	632	PEDESTAL, 15' TRANSFORMER BASE, AS PER PLAN	1	EA		
93	632	REMOVAL OF TRAFFIC SIGNAL INSTALLATION, AS PER PLAN	1	EA		
94	633	CABINET, TYPE TS-2, AS PER PLAN	1	EA		
95	633	CABINET FOUNDATION, AS PER PLAN	1	EA		
96	633	UNITERRUPTIBLE POWER SUPPLY (UPS), 1000 WATT, AS PER PLAN	1	EA		
97	804	FAN OUT KIT, 6 FIBER, AS PER PLAN	1	EA		
98	804	DROP CABLE, 6 FIBER, AS PER PLAN	350	LF		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

Addendum 1  
 (Revised)

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
99	804	FIBER OPTIC PATCH CORD, 2 FIBER	1	EA		
100	804	FIBER TERMINATION PANEL, 12 FIBER, AS PER PLAN	1	EA		
101	804	SPLICE ENCLOSURE, IN-LINE	1	EA		
102	804	FIBER OPTIC TESTING, AS PER PLAN	1	LUMP		
103	804	FIBER OPTIC CABLE MEDIA CONVERTER, ETHERNET, AS PER PLAN	1	EA		
104	804	CCTV IP-CAMERA SYSTEM, DOME TYPE, AS PER PLAN	1	EA		
105	809	STOP LINE RADAR DETECTION, AS PER PLAN	2	EA		
106	809	ATC V6.24 CONTROLLER, AS PER PLAN	1	EA		
<b>GREATER CINCINNATI WATER WORKS</b>						
107	1101	FURNISHING AND LAYING 6" DUCTILE IRON PIPE AND FITTINGS	20	LF		
108	1101	FURNISHING AND LAYING 12" DUCTILE IRON PIPE AND FITTINGS	20	LF		
109	1110	CONCRETE, CLASS "C"	3	CY		
110	1112	HAULING AND INSTALLING FIRE HYDRANT	1	EA		
111	1116	FURNISHING AND INSTALLING VALVE BOX COMPLETE	1	EA		

\* Denotes Contingency Item



**PROJECT: SHARON ROAD RIGHT TURN LANE & RESURFACING**  
**OWNER: CITY OF SHARONVILLE, OHIO**  
**PROJECT #: 200122**  
**BID OPENING DATE & TIME: THURSDAY, MAY 13, 2021 @ 10:00 am**

*Addendum 1  
(Revised)*

Item No.	Spec. No.	ITEM	Est. Qtys.	Unit of Measure	Unit Cost	Item Cost
112	509	REINFORCING STEEL	54	LBS		
<b>TOTAL BASE BID</b>						