



ADDENDUM #2

Job #: 210945 **Project Title:** KEMPER & WINTON ROAD IMPROVEMENTS
Client: FOREST PARK

Issue Date: FRIDAY, MARCH 11, 2022

Bid Date: FRIDAY, MARCH 18, 2022 at 11:00 AM

THIS IS TO CERTIFY THAT YOU ARE IN RECEIPT OF ADDENDUM #2 FOR THE ABOVE-MENTIONED PROJECT.

PLEASE SIGN AND RETURN BY EMAIL TO PEGGY BELLEW AT pbellew@ctconsultants.com.

Name / Title:

Company:

Date:

PLEASE SEE THE ATTACHED SUMMARY OF CHANGES, REVISED PLANS SHEETS, AND REVISED BID TAB.

Please note there is no change in the bid opening date and time.

END ADDENDUM 2



ADDENDUM #2
SUMMARY OF PLAN CHANGES

PLAN SHEETS

1	TITLE	Revised City Officials Information.
---	-------	-------------------------------------

BID TAB

Item #	Spec #	
88	625	Updated unit of measure to LF
90	632	Updated unit of measure to EA
91	632	Updated unit of measure to EA
93	632	Updated unit of measure to EA
94	632	Updated unit of measure to EA
95	632	Updated unit of measure to EA
96	632	Updated unit of measure to LF
97	632	Updated bid item to Removal of Miscellaneous Traffic Signal Item: Pushbutton & Sign and updated unit of measure to EA
98	632	Updated unit of measure to EA
99	809	Updated unit of measure to EA
100	809	Updated unit of measure to EA

UTILIZE BID TAB FROM ADDENDUM 2. THIS IS A GENERAL SUMMARY OF REVISIONS. DOES NOT CONSTITUTE OR GUARANTEE THAT OTHER REVISIONS WERE MADE



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
WINTON ROAD						
1	201	CLEARING AND GRUBBING, AS PER PLAN	1	LS		
2	202	INLET REMOVED	1	EA		
3	251*	PARTIAL DEPTH PAVEMENT REPAIR (AS NEEDED. 2%)	879	SY		
4	253*	PAVEMENT REPAIR, AS PER PLAN (2%)	879	SY		
5	254	PAVEMENT PLANING, ASPHALT CONCRETE (2-1/2")	43,972	SY		
6	407	TACK COAT, TRACKLESS - INTERMEDIATE COURSE (0.09 GALLON/SY)	3,957	GAL		
7	407	TACK COAT, TRACKLESS - SURFACE COURSE (0.06 GALLON/SY)	2,638	GAL		
8	441	ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG64-22 (1")	1,343	CY		
9	441	ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22 (1-1/2")	1,924	CY		
10	SPL	ASPHALT CONCRETE, MISC,; ASPHALT REJUVENATING AGENT	43,972	SY		
11	608	5" CONCRETE WALK	1,590	SF		
12	608	CURB RAMP, includes flush concrete curb and truncated domes	10	EA		
13	609	COMBINATION CURB AND GUTTER, TYPE 2	400	LF		
14	609	CONCRETE TRAFFIC ISLAND, REMOVAL AND REPLACEMENT	110	SY		
15	611	CATCH BASIN, CB-2-2B WITH GRATE CASTING	1	EA		
16	611	MANHOLE NO. 3, WITH CASTING AND LID	1	EA		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
17	611*	MANHOLE ADJUSTED TO GRADE (STORM)	2	EA		
18	611	12" CONDUIT, TYPE C (ODOT 706.02)	12	LF		
19	611	CATCH BASIN RECONSTRUCTION - SINGLE GRATE INLET - REBUILD TOP 18" USING PRECAST TOP	24	EA		
20	611	CATCH BASIN RECONSTRUCTION - DOUBLE GRATE INLET - REBUILD TOP 18" USING PRECAST TOP	6	EA		
21	611	FURNISH NEW CURB PLATE, S.G.I. AS PER PLAN	24	EA		
22	611	FURNISH NEW CURB PLATE, D.G.I. AS PER PLAN	6	EA		
23	611	FURNISH NEW GRATE, AS PER PLAN	36	EA		
24	614	MAINTENANCE OF TRAFFIC	1	LS		
25	614	MAINTAINING TRAFFIC, MISC.: TEMPORARY PAVEMENT MARKINGS	1	LS		
26	624	MOBILIZATION	1	LS		
27	630	SIGNAGE	5	EA		
28	630	GROUND MOUNTED SUPPORT, NO. 3 POST	65	LF		
29	642	ISLAND MARKING, TYPE 1	3,670	SF		
30	644	EDGE LINE WHITE - 4"	1.9	MILE		
31	644	EDGE LINE YELLOW - 4"	1.88	MILE		
32	644	LANE LINE, 4"	1.91	MILE		
33	644	CHANNELIZING LINE - 8"	1,938	LF		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
34	644	STOP LINE, 24"	288	LF		
35	644	LANE ARROW	31	EA		
36	644	DOUBLE YELLOW CENTERLINE	106	LF		
37	644	CROSSWALK LINE, 12"	1,356	LF		
38	644	CROSSWALK LINE, LADDER STYLE	180	LF		
39	644	CROSSWALK SURFACE SYSTEM, ENNIS FLINT TRAFFIC PATTERNS	2,500	SF		
40	653*	TOPSOIL FURNISHED AND PLACED	25	CY		
41	SPL	MODULAR WALL SECTION	90	SF		
42	SPL*	MANHOLE ADJUSTED TO GRADE, SANITARY SEWER MANHOLE ADJUSTED TO GRADE; AS PER PLAN; LABOR AND MATERIAL	6	EA		
43	SPL*	MANHOLE REPAIRED AND ADJUSTED TO GRADE, SANITARY MANHOLE. AS PER PLAN; LABOR AND MATERIAL	1	EA		
44	SPL*	BRICK MASONRY MANHOLE REPAIR, SANITARY SEWER MANHOLE, AS PER PLAN; LABOR AND MATERIAL	1	EA		
45	SPL	BUS PAD - 11" PLAIN CONCRETE PAVEMENT, AS PER PLAN (80'L x 10'W x 11"D)	445	SY		
46	SPL	SPECIAL STRUCTURE, MISC.: TRANSIT STOP (SHELTER) BUS SHELTER (INCL CONCRETE PAD)	2	EA		
47	SPL	SPECIAL - MISC.: BENCHES (INCL CONCRETE PAD)	3	EA		
48	SPL	SPECIAL - MISC.: TRASH RECEPTACLES (INCL CONCRETE PAD)	3	EA		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
49	SPL	SPECIAL - MISC.: BICYCLE RACK (INCL CONCRETE PAD)	2	EA		
SUBTOTAL - WINTON ROAD						
WEST KEMPER ROAD						
50	201	CLEARING AND GRUBBING, AS PER PLAN (Includes Stump removal as specified)	1	LS		
51	209	DITCH CLEANOUT, AS PER PLAN	4,440	LF		
52	251*	PARTIAL DEPTH PAVEMENT REPAIR (AS NEEDED. 2%)	435	SY		
53	253*	PAVEMENT REPAIR, AS PER PLAN (2%)	435	SY		
54	254	PAVEMENT PLANING, ASPHALT CONCRETE (2-1/2" Full Width)	21,785	SY		
55	407	TACK COAT, TRACKLESS - INTERMEDIATE COURSE (0.09 GALLON/SY)	1,960	GAL		
56	407	TACK COAT, TRACKLESS - SURFACE COURSE (0.06 GALLON/SY)	1,307	GAL		
57	441	ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG64-22 (1")	666	CY		
58	441	ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22 (1-1/2")	952	CY		
59	SPL	ASPHALT CONCRETE, MISC.; ASPHALT REJUVENATING AGENT	21,785	SY		
60	452	NON-REINFORCED CONCRETE PAVEMENT, MISC.: 6" PLAIN PORTLAND CEMENT CONCRETE DRIVEWAY REMOVAL & REPLACEMENT	4,250	SY		
61	608	5" CONCRETE WALK	2,835	SF		
62	608	CURB RAMP, INCLUDES FLUSH CONCRETE CURB AND TRUNCATED DOMES	17	EA		
63	609	TYPE 6 CURB, FLUSH TO PAVEMENT	8,110	LF		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
64	611	CB2-2-A WITH GRATE CASTING, INSTALLED ON EXISTING 12" STORM	4	EA		
65	611	12" CONDUIT, TYPE D (ODOT 706.02)	44	LF		
66	611*	12" CONDUIT, TYPE D (ODOT 706.02), DRIVE CULVERT REMOVAL AND REPLACEMENT	200	LF		
67	614	MAINTAINING TRAFFIC	1	LS		
68	624	MOBILIZATION	1	LS		
69	630	SIGNAGE	12	EA		
70	630	GROUND MOUNTED SUPPORT, NO. 3 POST	156	LF		
71	644	EDGE LINE WHITE - 4"	1.55	MILE		
72	644	LANE LINE, 4"	0.06	MILE		
73	644	CHANNELIZING LINE - 8"	1,717	LF		
74	644	STOP LINE, 24"	147	LF		
75	644	LANE ARROW	27	EA		
76	644	DOUBLE YELLOW CENTERLINE	6,012	LF		
77	644	CROSSWALK LINE, 12"	753	LF		
78	644	TRANSVERSE / DIAGONAL LINE	378	LF		
79	644	ISLAND MARKING	33	SF		
80	653*	TOPSOIL FURNISHED AND PLACED	40	CY		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
81	SPL	BUS PAD - 11" PLAIN CONCRETE PAVEMENT, AS PER PLAN (80'L x 10'W x 11"D)	89	SY		
82	SPL	SPECIAL - MISC.: BENCHES (INCL. CONCRETE PAD)	3	EA		
83	SPL	SPECIAL - MISC.: TRASH RECEPTACLES (INCL. CONCRETE PAD)	2	EA		
84	SPL	SPECIAL - MISC.: BICYCLE RACK (INCL. CONCRETE PAD)	4	EA		
SUBTOTAL - KEMPER ROAD						
TRAFFIC ITEMS - INCLUDES WINTON ROAD AND KEMPER ROAD						
85	625	GROUND ROD	2	EA		
86	625	PULLBOX, 725.08, 18"	2	EA		
87	625	CONDUIT 2", 725.051	40	LF		
88	625	TRENCH	40	LF		
89	625	CONDUIT, MISC.: CONDUIT CONNECTION	2	EA		
90	632	DETECTOR LOOP	5	EA		
91	632	LOOP DETECTOR TIE IN	5	EA		
92	632	PEDESTAL, 8', TRANSFORMER BASE	2	EA		
93	632	PEDESTAL FOUNDATION	2	EA		
94	632	PEDESTRIAN PUSHBUTTON, AS PER PLAN	2	EA		
95	632	PEDESTRIAN SIGNAL, (LED), (COUNTDOWN), TYPE D2	2	EA		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
96	632	SIGNAL CABLE, 5 CONDUCTOR, NO 14 AWG	650	LF		
97	632	CONTROLLER ITEM MISC.: MODIFY EXISTING CONTROLLER AND CABINET	1	EA		
98	632	REMOVAL OF MISCELLANEOUS TRAFFIC SIGNAL ITEM: PUSHBUTTON & SIGN	2	EA		
99	809	STOP LINE AND ADVANCE RADAR DETECTION, AS PER PLAN	2	EA		
100	809	ATC V6.24 CONTROLLER, AS PER PLAN	1	EA		
SUBTOTAL - TRAFFIC ITEMS						
ALTERNATE #1 - KEMPER MEADOWS DRIVE						
101	251	*PARTIAL DEPTH PAVEMENT REPAIR (AS NEEDED. 2%)	77	SY		
102	253	*PAVEMENT REPAIR, AS PER PLAN (2%)	77	SY		
103	254	PAVEMENT PLANING, ASPHALT CONCRETE (2-1/2" Full Width)	3,856	SY		
104	407	TACK COAT, TRACKLESS - INTERMEDIATE COURSE (0.09 GALLON/SY)	347	GAL		
105	407	TACK COAT, TRACKLESS - SURFACE COURSE (0.06 GALLON/SY)	231	GAL		
106	441	ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 1, (448), PG64-22 (1")	118	CY		
107	441	ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG 64-22 (1-1/2")	168	CY		
108	SPL	ASPHALT CONCRETE, MISC,; ASPHALT REJUVENATING AGENT	3,856	SY		
109	611	*MANHOLE ADJUSTED TO GRADE (STORM)	3	EA		
110	644	CHANNELIZING LINE - 8"	140	LF		

* Denotes Contingency Item



ADDENDUM 2

Item No.	Spec. No.	Item	Estimated Quantity	Unit of Measure	Unit Cost Total	Item Cost
111	644	STOP LINE, 24" WHITE	19	LF		
112	644	LANE ARROW	2	EA		
113	644	DOUBLE YELLOW CENTERLINE	220	LF		
114	644	CENTERLINE (SOLID/DASHED)	1,200	LF		
115	653*	TOPSOIL FURNISHED AND PLACED	5	CY		
116	614	MAINTAINING TRAFFIC	1	LS		
117	SPL*	MANHOLE ADJUSTED TO GRADE, SANITARY SEWER MANHOLE ADJUSTED TO GRADE; AS PER PLAN; LABOR AND MATERIAL	4	EA		
118	SPL*	MANHOLE REPAIRED AND ADJUSTED TO GRADE, SANITARY MANHOLE. AS PER PLAN; LABOR AND MATERIAL	4	EA		
119	SPL*	BRICK MASONRY MANHOLE REPAIR, SANITARY SEWER MANHOLE, AS PER PLAN; LABOR AND MATERIAL	4	EA		
SUBTOTAL - ALTERNATE #1 - KEMPER MEADOW DRIVE						
TOTAL: BASE BID						
TOTAL: BASE BID + ALTERNATE #1 - KEMPER MEADOW DRIVE						

* Denotes Contingency Item

CITY OF FOREST PARK


HAMILTON COUNTY, OHIO

WINTON ROAD & WEST KEMPER IMPROVEMENTS

210945
MARCH 2022

CITY OFFICIALS

MAYOR
AHARON BROWN
1ST VICE-MAYOR
DENISE HOLT
2ND VICE-MAYOR
ROSALIND MOORE
CLERK OF COUNCIL
SALLY BOYD
CITY COUNCIL
TRAVINA ADAMS
CHELSEA CLARK
TERENCE HARRISON
REGINALD SYLVESTER

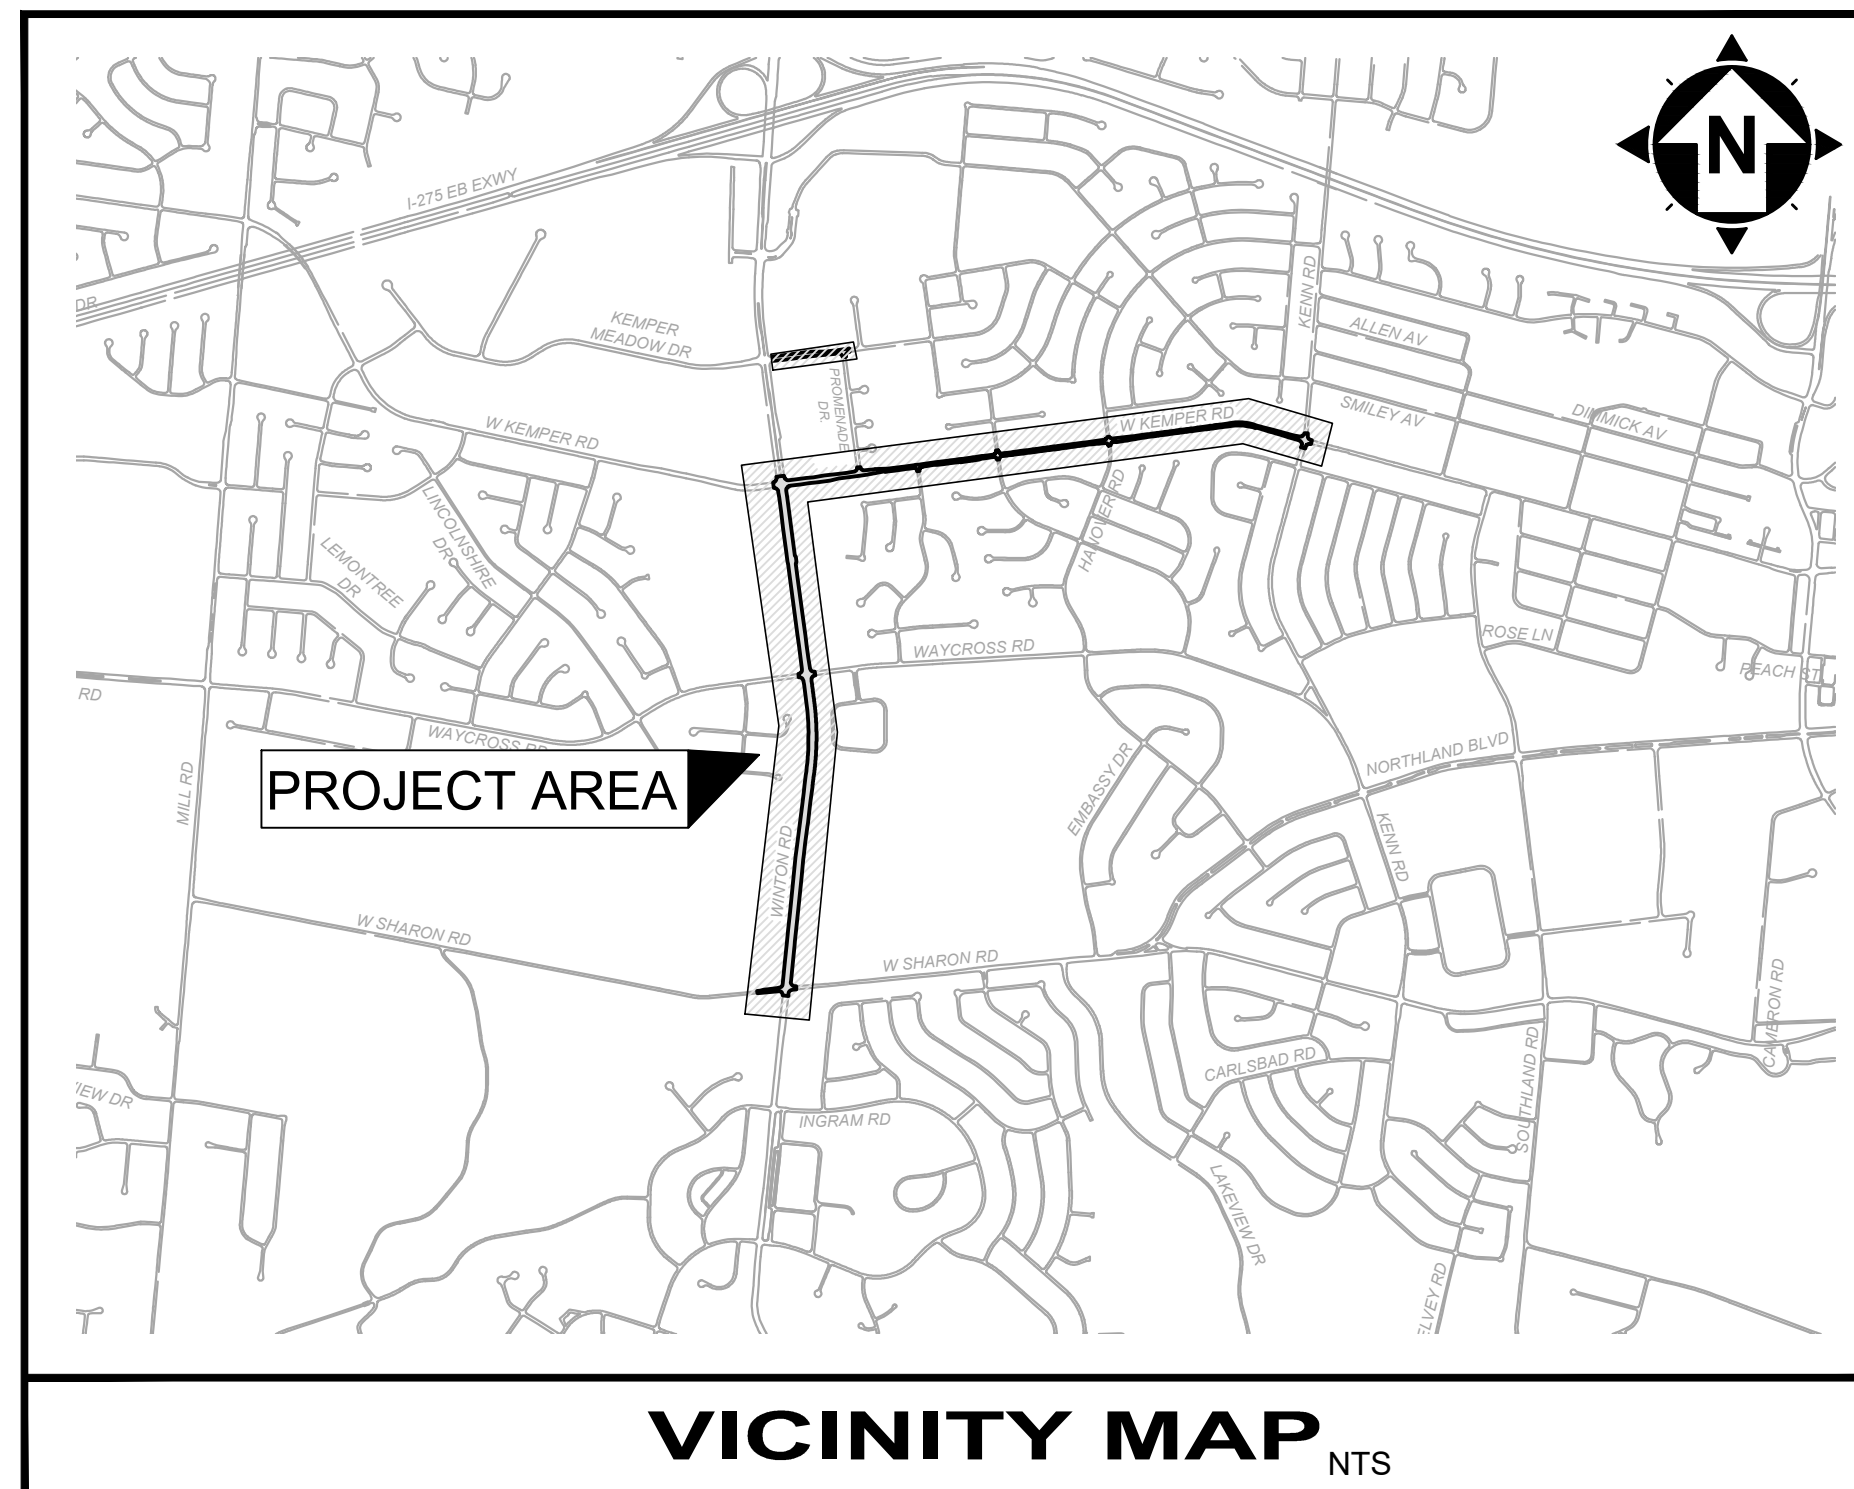

ODOT STANDARD DRAWINGS

THE CURRENT EDITION OF THE ODOT STANDARD DRAWINGS ARE HEREBY MADE PART OF THESE PLANS.

PROJECT SPECIFICATIONS

IN GENERAL, THE PROJECT SPECIFICATIONS CONFORM TO THE JANUARY 1, 2019 STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING CHANGES AND SUPPLEMENTAL SPECIFICATIONS THERETO. THE PROJECT SPECIFICATIONS, UNDER SEPERATE COVER, PREPARED BY CT CONSULTANTS SHALL GOVERN ALL WORK AND MATERIALS FOR THIS PROJECT.

UNDERGROUND UTILITIES

Contact Two Working Days Before You Dig



OHIO811, 8-1-1, or 1-800-362-2764 (Non-members must be called directly)

INDEX OF SHEETS

TITLE SHEET	1
TYPICAL SECTIONS	2-4
GENERAL NOTES	5
MAINTENANCE OF TRAFFIC	6
PLAN SHEETS	7-20
PAVEMENT MARKING PLANS	21-36
DETAILS	37-39



NO	REVISION	DATE

WINTON ROAD & WEST KEMPER IMPROVEMENTS
 CITY OF FOREST PARK
 HAMILTON COUNTY, OHIO
TITLE SHEET

APPROVED FOR CONSTRUCTION BY:

STEVE GALLENSTEIN, DIRECTOR OF PUBLIC WORKS

DATE



ERIC MORRIS, P.E. #E-67084

DATE

PROJECT NO.	
210945	
DISCIPLINE	
CIVIL	
SHEET NAME	
TITLE	
SHEET	OF
1	39