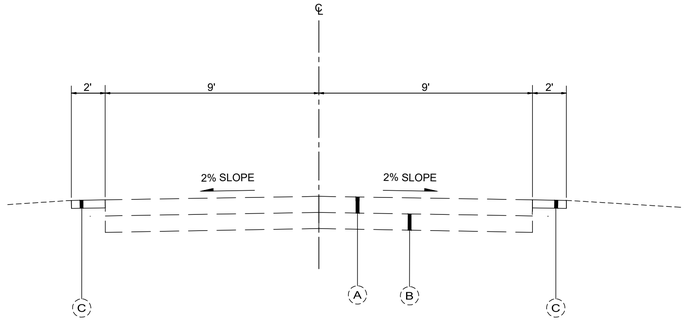

EXISTING SECTION
(FIELD STREET)

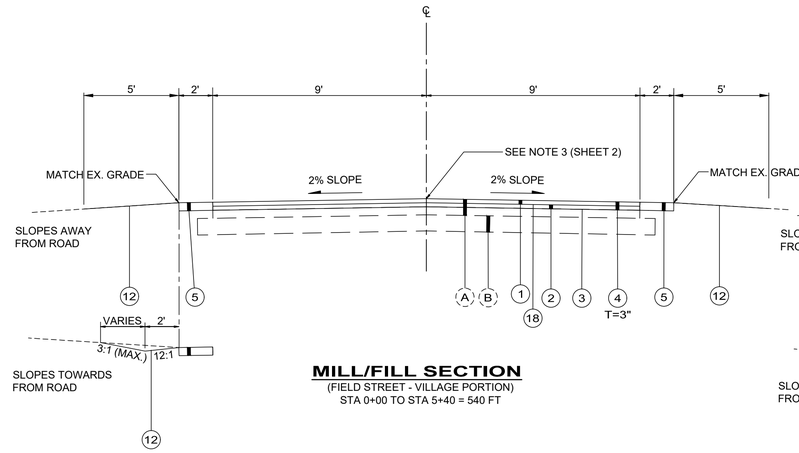

MILL/FILL SECTION
(FIELD STREET - VILLAGE PORTION)
STA 0+00 TO STA 5+40 = 540 FT

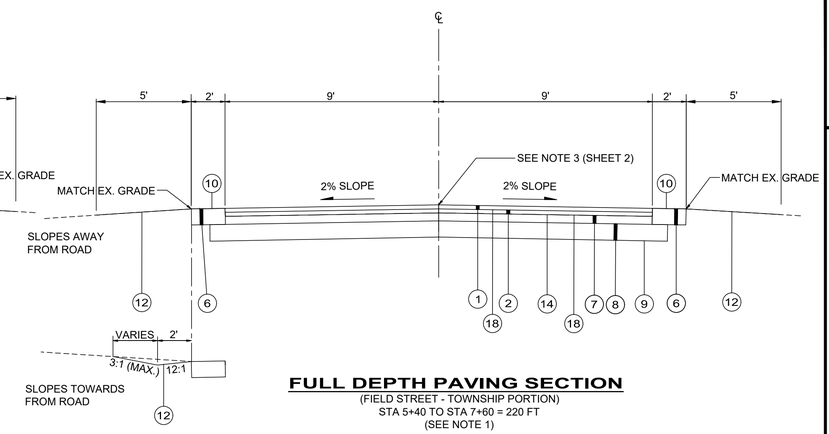

FULL DEPTH PAVING SECTION
(FIELD STREET - TOWNSHIP PORTION)
STA 5+40 TO STA 7+60 = 220 FT
(SEE NOTE 1)

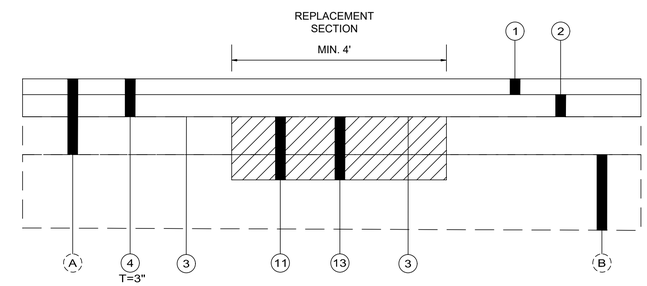

ITEM 253 PAVEMENT REPAIR, AS PER PLAN
(FIELD STREET)

NOTES

1. EXISTING PAVEMENT TO BE REMOVED WITHIN THESE LIMITS UNDER ITEM 202 PAVEMENT REMOVED.

VILLAGE OF OSTRANDER

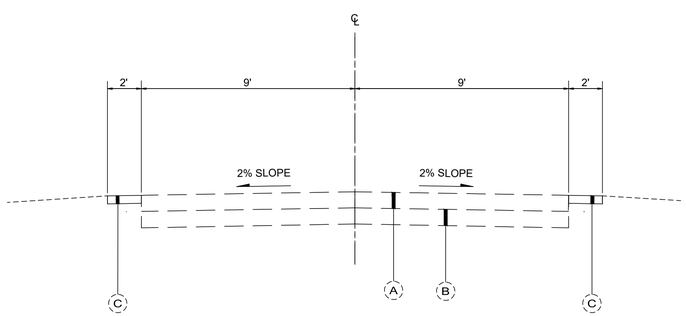

EXISTING SECTION
(VILLAGE OF OUSTRANDER)

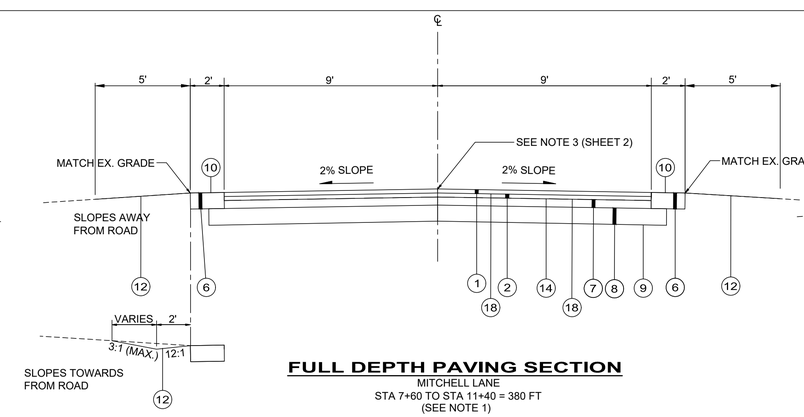

FULL DEPTH PAVING SECTION
MITCHELL LANE
STA 7+60 TO STA 11+40 = 380 FT
(SEE NOTE 1)

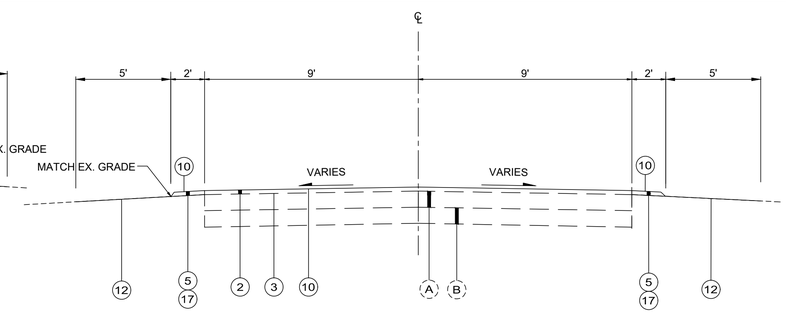

CHIP SEAL SECTION
(MITCHELL LANE)
STA 11+40 TO STA 30+52 = 1912 FT

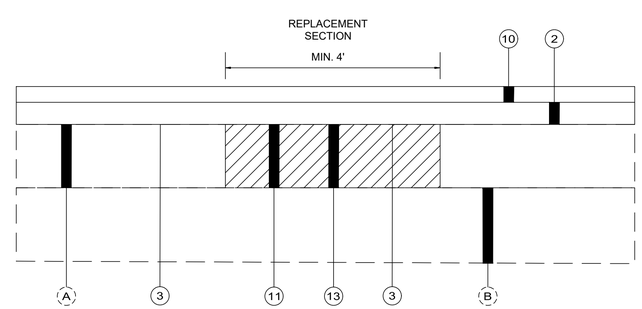

ITEM 253 PAVEMENT REPAIR, AS PER PLAN
(MITCHELL LN)

LEGEND:

- (A) EXISTING ASPHALT PAVEMENT (t = 6" +/-)
- (B) EXISTING AGGREGATE BASE (t = 6" +/-)
- (C) EXISTING GRAVEL SHOULDER (t = 3" +/-)
- (1) ITEM 441 - 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), PG64-22
- (2) ITEM 441 - 1-3/4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 2, (448)
- (3) ITEM 407 - NON-TRACKING TACK COAT (0.09 GAL/SY)
- (4) ITEM 254 - PAVEMENT PLANING ASPHALT CONCRETE (THICKNESS AS SHOWN)
- (5) ITEM 617 - 2" COMPACTED AGGREGATE, TYPE A
- (6) ITEM 617 - 6" COMPACTED AGGREGATE, TYPE A
- (7) ITEM 301 - 3" ASPHALT CONCRETE BASE, PG64-22
- (8) ITEM 304 - 6" AGGREGATE BASE
- (9) ITEM 204 - SUBGRADE COMPACTION
- (10) ITEM 422 - SINGLE CHIP SEAL, TYPE A
- (11) ITEM 202 - PAVEMENT REMOVED (BY MILLING)
- (12) ITEM 659 - SEEDING AND MULCHING, CLASS 1, AS PER PLAN
- (13) ITEM 301 - ASPHALT CONCRETE BASE, PG64-22 (VARIES 3" TO 5", AS DIRECTED BY THE ENGINEER)
- (14) ITEM 407 - TACK COAT (0.06 GAL/SY)
- (15) ITEM 452 - 8 INCH NON-REINFORCED CONCRETE DRIVES AND APRONS, CLASS QC MS, INCLUDING REMOVAL, AS PER PLAN
- (16) ITEM 304 - 4" AGGREGATE BASE
- (17) ITEM 209 - LINEAR GRADING
- (18) ITEM 407 - NON-TRACKING TACK COAT (0.06 GAL/SY)

SCIOTO TOWNSHIP

BID SET

your trusted advisor
consultants
engineers
architects
planners

NO	REVISION	DATE

ISSUED FOR:	
ISSUE DATE:	8/9/2023
SCALE:	NTS
DESIGNED BY:	EJT
DRAWN BY:	ADG
CHECKED BY:	JWH

FIELD STREET & MITCHELL LANE IMPROVEMENTS
VILLAGE OF OSTRANDER, OHIO

TYPICAL SECTIONS

PROJECT NO.	
231192	
DISCIPLINE	
CIVIL	
SHEET NAME	
DETAILS	
SHEET	OF
3A	5